




## BEARING-MALAYSIA SDN.BHD.

65 mm x 85 mm x 10 mm NTN 6813ZZ deep groove ball bearings

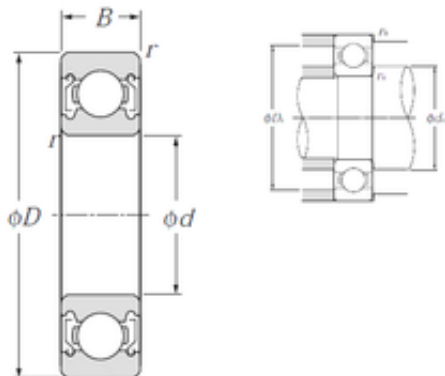

Bearing No. 6813ZZ

6813ZZ Bearing 2D drawings and 3D CAD models

Size	65x85x10 mm
Bore Diameter	65 mm
Outer Diameter	85 mm
Width	10 mm
d	65 mm
D	85 mm
B	10 mm
C	10 mm
rn	0,5 mm
r min.	0,6 mm
da min.	69 mm
da max	70 mm
Da max.	81 mm
ra max.	0,6 mm
Weight	0,128 Kg
Basic dynamic load rating (C)	11,6 kN
Basic static load rating (C0)	11 kN
(Grease) Lubrication Speed	7 400 r/min
Category	Single Row Ball Bearings
Inventory	0.0
Manufacturer Name	NTN
Minimum Buy Quantity	N/A
Weight / Kilogram	0
Product Group	B00308
Enclosure	2 Metal Shields



## BEARING-MALAYSIA SDN.BHD.

Precision Class	ABEC 1   ISO P0
Maximum Capacity / Filling Slot	No
Rolling Element	Ball Bearing
Snap Ring	No
Internal Special Features	No
Cage Material	Steel
Internal Clearance	C0-Medium
Inch - Metric	Metric
Long Description	65MM Bore; 85MM Outside Diameter; 10MM Outer Race Width; 2 Metal Shields; Ball Bearing; ABEC 1   ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; Stee
Other Features	Deep Groove   Shell Alvania Prelubricated
Category	Single Row Ball Bearing
UNSPSC	31171504
Harmonized Tariff Code	8482.10.50.68
Noun	Bearing
Keyword String	Ball
Manufacturer URL	<a href="http://www.ntnamerica.com">http://www.ntnamerica.com</a>
Weight / LBS	0.26
Inner Race Width	0 Inch   0 Millimeter
Outside Diameter	3.346 Inch   85 Millimeter
Outer Race Width	0.394 Inch   10 Millimeter
Bore	2.559 Inch   65 Millimeter
bore diameter:	65 mm
precision rating:	ISO Class 0
outside diameter:	85 mm
finish/coating:	Uncoated



## BEARING-MALAYSIA SDN.BHD.

overall width:	10 mm
bearing material:	High Carbon Chrome Steel
bore type:	Round
cage material:	Steel
closure type:	Double Shielded
inner ring width:	10 mm
row type & fill slot:	Single Row Non-Fill Slot
outer ring width:	10 mm
snap ring included:	Without Snap Ring
maximum rpm (grease):	7400 rpm
internal clearance:	CN
fillet radius:	0.6 mm
operating temperature range:	-40 to 120 ° C
maximum rpm:	7400 RPM
dynamic load capacity:	11600 N
series:	68
static load capacity:	11000 N
manufacturer product page:	<a href="#">Click here</a>