




BEARING-MALAYSIA SDN.BHD.

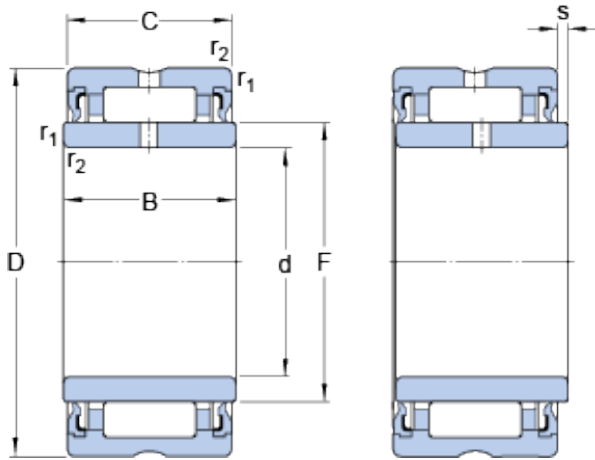

40 mm x 62 mm x 23 mm SKF NA 4908.2RS
cylindrical roller bearings

Bearing No. NA 4908.2RS

NA 4908.2RS Bearing 2D drawings and 3D CAD models

Size	62x40x23 mm
Bore Diameter	62 mm
Outer Diameter	40 mm
Width	23 mm
d	40 mm
D	62 mm
B	23 mm
C	22 mm
F	48 mm
r _{1,2} - min.	0.6 mm
s	0.5 mm
d _a - min.	44 mm
D _a - max.	58 mm
r _a - max.	0.6 mm
Basic dynamic load rating - C	36.9 kN
Basic static load rating - C ₀	58.5 kN
Fatigue load limit - P _u	7.1 kN
Limiting speed	4000 r/min
Category	Roller Bearings
Inventory	0.0
Manufacturer Name	SKF
Minimum Buy Quantity	N/A
UNSPSC	31171512
Weight / Kilogram	0.261



BEARING-MALAYSIA SDN.BHD.

Product Group	B04144
bore diameter:	40 mm
dynamic load capacity:	36.9 kN
outside diameter:	62 mm
static load capacity:	58.5 kN
overall width:	23 mm
maximum rpm:	4000 rpm
needle bearing type:	Machined Bearing with Inner Ring
flanges:	With Flanges
closure type:	Double Sealed
seal material:	Nitrile
number of rows:	One
series:	NA
bearing material:	Steel
lubrication hole type:	Hole on Outer Ring
operating temperature range:	-40 to +210 ° F ° F
precision rating:	Not Rated
cage material:	Steel
manufacturer upc number:	7316577012166
$r_{1,2}$ min.	0.6 mm
s max.	0.5 mm
d_a min.	44 mm
D_a max.	58 mm
r_a max.	0.6 mm
Basic dynamic load rating C	36.9 kN
Basic static load rating C_0	58.5 kN
Fatigue load limit P_u	7.1 kN
Mass bearing	0.25 kg